ROYAL
AERONAUTICAL
SOCIETY

SURVEY PAPER

A comprehensive review and future challenges of energy-aware path planning for small unmanned aerial vehicles with hydrogen-powered hybrid propulsion

H. Çinar[1,2] , D. Ignatyev[1] and A. Zolotas[1]

[1]Faculty of Engineering and Applied Sciences, Centre for Autonomous and Cyber-Physical Systems, Cranfield University, Cranfield, UK
[2]Faculty of Aeronautics and Astronautics, Department of Aeronautical Engineering, Necmettin Erbakan University, Konya, Republic of Türkiye
Corresponding author: A. Zolotas; Email: a.zolotas@cranfield.ac.uk

Abstract
Unmanned aerial vehicles (UAVs) with fully electric propulsion systems mainly use lithium-based batteries. However, using fuel cells, hybrid propulsion systems are created to improve the flight time and payload capacity of the UAVs. Energy management and energy-aware path planning are important aspects to be explored in hybrid-propulsion powered UAV configurations. These facilitate optimal power distribution among energy sources and motion planning considering energy consumption, respectively. In the literature, although there are many studies on the energy management of hybrid-powered UAVs and path planning of only battery-powered UAVs, there are research gaps in energy-aware path planning of hybrid-powered UAVs. Additionally, the energy management of hybrid-powered UAVs is usually considered independent of path planning in the literature. This paper thoroughly reviews recent energy-aware path planning for small UAVs to address the listed critical challenges above, providing a new perspective and recommendations for further research. Firstly, this study evaluates the recent status of path planning, hydrogen-based UAVs, and energy management algorithms and identifies some challenges. Later, the applications of hydrogen-powered UAVs are summarised. In addition, hydrogen-based hybrid power system topologies are defined for small UAVs. Then, the path-planning algorithms are classified, and existing studies are discussed. Finally, this paper provides a comprehensive and critical assessment of the status of energy-aware path planning of UAVs, as well as detailed future work recommendations for researchers.

Nomenclature

ABC	Artificial Bee Colony
AC	air cooled
AAM	advanced air mobiltiy
AI	artificial intelligence
APF	artificial potential field
BaFA	back-and-forth algorithm
BEC	battery eliminator circuit
BiCC	bipartite cooperative coevolution
BMS	battery management systems
CFD	computational fluid dynamics
DMFC	direct methanol fuel cell
DPA	dijkstra's path algorithm
DC	direct current

*EEA**	energy efficient A*
EMS	energy management system
ECMS	equivalent consumption minimisation strategy
EEMS	external energy maximisation strategy
ESC	electronic speed control
EM²CPP	energy-aware multi-uav multi-area coverage path planning
EOL	end-of-life
EAOA	energy-aware obstacle avoidance
EaPP	energy-aware path planning
FNNSCP	A fuzzy neural network adaptive sequential convex optimisation
FL	fuzzy logic
GPS	Global Position System
GA	genetic algorithm
GNSS	Global Navigation Satellite Systems
HMPC	hierarchical model predictive control
LC	liquid cooled
MPC	model predictive control
ML	machine laearning
mCPP	multi-UAV coverage path planning
MO-GA	multi objective-genetic algorithm
MOT	maximum operating temperature
NFZs	non-flying zones
OGSE	online generalised shape expansion
OSD	on screen display
I-PSO	improved particle swarm optimisation
I	current
PID	proportional integral derivative
PPS	parallel partitioning along a side
P	power
PRM	probabilistic roadmap
PEMFC	proton-exchange membrane fuel cell
RL	reinforcement learning
RRT	rapidly exploring random tree
RUL	remaining useful life
SOC	state-of-charge
SOFC	solid oxide fuel cell
SOH	state-of-health
SARSA	state–action–reward–state–action
TIG	thermionic generator
TEG	thermoelectric generator
UAV	unmanned arial vehicle
UAM	urban air mobility
VTOL	verticle take-off landing
V	voltage

Other nomenclature and symbols are defined as they appear.

1.0 Introduction

In recent years, unmanned aerial vehicle (UAV) applications rapidly expanded and have a high volume in aeronautics [1]. UAVs are used in many areas such as infrastructure monitoring and inspection, defence and security, emergency response, environmental studies, earth sciences and commercial applications [2–5]. The UAV market size has grown from approximately $15 billion in 2018 to $40 billion in 2024 [6]. It is predicted that the UAV market size will reach about $90 billion over the next decade [7].

Table 1. *Comparison of existing review studies on path planning of UAVs*

Ref., Year	Highlights	Components[a]				
		1	2	3	4	5
2020 [51]	Detailed comparison and classification	−	✓	✓	✓	✓
2022 [55]	Environment classification and optimisation	−	✓	✓	✓	−
2023 [56]	Systematic literature review	−	✓	✓	−	−
2018 [52]	Computational intelligence-based algorithms	−	−	✓	✓	−
2022 [58]	Meta-heuristic algorithms	−	−	✓	✓	−
2023 [59]	Classification and comparison for AI techniques	−	✓	✓	−	−
2022 [60]	Region coverage-aware path planning	✓	✓	✓	−	−
2023 [61]	Categorization of path planning algorithms	−	✓	✓	−	−
2024 [54]	Classical versus reinforcement learning algorithms	✓	✓	✓	−	−
2022 [53]	Energy efficient and cooperative strategies	✓	✓	✓	✓	−
This paper	Energy-aware and hydrogen-based hybrid propulsion	✓	✓	✓	✓	✓

[a]Remark for the column of components the listed review studies incorporate/compare: 1 - energy-aware operation, 2 - comparing applications, 3 - suggesting future research direction, 4 - discussing challenges, 5 - including UAV system description.

As technological developments in sensors, embedded systems, microprocessors, batteries and fuel cells continue to advance, the market size of UAVs will also increase simultaneously.

UAVs can be classified according to wing type, take-off mass, range, altitude, propulsion type and mission [8, 9]. Small-type unmanned vehicles are defined as those having a take-off mass of 25–150 kg, a range of less than 50 km, and an altitude of no more than 3,000 m [10, 11]. However, regardless of the type of UAV, the long flight duration and high payload capacity are required in many applications, such as surveillance and monitoring, that use unmanned aerial vehicles [12]. In this regard, hydrogen-powered UAVs have attracted a lot of attention recently since the current lithium-based battery technology limits the flight time and payload capacity of small UAVs [13–15]. The main reasons for this are that fuel cells can produce power as they are fuelled and have a higher energy density (Wh/kg) than batteries [16, 17]. Among the top research topics in hydrogen-powered UAVs are energy management and energy-aware path planning, which guarantee safe and effective flight.

Although several review papers address UAV path planning (Table 1), no detailed study has been conducted considering the energy-aware path planning for UAVs. Moreover, existing energy-aware path planning studies only focus on battery-powered UAVs. In this context, this study presents detailed research on energy-aware path planning for hydrogen-powered UAVs. Furthermore, it examines the integration of energy management and energy-aware path planning for UAVs with hybrid propulsion. Thus, this study aims to highlight the importance of energy-aware path planning for hydrogen-powered small UAVs (powered solely by fuel cells or hybridised with batteries). Firstly, it presents an overview of hydrogen-powered UAVs, energy-aware path planning, and energy management, in addition to the motivation and contribution of this paper. It then assesses the review papers on energy management and energy-aware path planning for UAVs with hybrid propulsion. Afterward, this study reviews commercial examples of hydrogen-powered UAVs with prominent fuel cell manufacturers. An important contribution of this paper is the identification of key research gaps to guide future investigations aimed at unlocking the full potential of hydrogen-powered UAVs for long-endurance and sustainable applications.

Figure 1 illustrates the structure of this study. Accordingly, the remainder of this paper is organised as follows: the introduction presents overviews of path planning, energy management and hydrogen-based UAVs, along with this paper's contribution and motivation. In Section 2.0, the current review papers on energy management and energy-aware path planning are evaluated. Section 3.0 discusses applications of hydrogen-based UAVs. Then, Section 4.0 explains the hybrid topologies and components of the small UAV. Section 5.0 reviews energy-aware path planning for UAVs. Following this, Section 6.0 proposes recommendations for future work on energy-aware path planning. Finally, the conclusions are presented in Section 7.0.
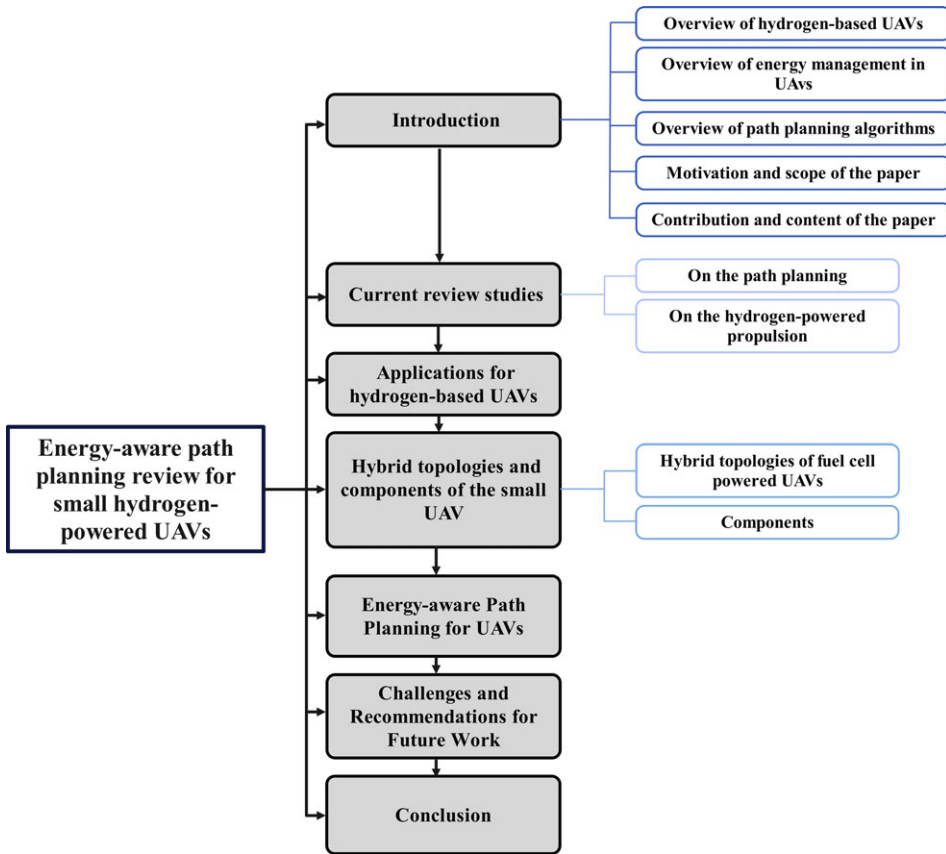
Figure 1. *The structure of this study.*

1.1 Overview of hydrogen-based UAVs

In the fully electric propulsion systems of UAVs, proton exchange membrane (PEM), direct methanol (DM) and solid oxide (SO) fuel cells act as an alternative energy source to batteries [18]. The most prevalent of these in small-type UAVs are PEMFCs. They are gaining attention in UAVs with fully electric power systems due to their higher energy density compared to batteries. For example, Ref. [19] compares the energy density of batteries and fuel cells. Accordingly, in current technology, lithium-based batteries have an energy density of 130–200 Wh/kg, while a proton exchange fuel cell has an energy density of 600–1,000 Wh/kg. Forecast studies on the application of fuel cells in aviation have been presented in the Refs [20, 21]. According to these studies, some projections suggest that by 2050, electric aircraft could be powered solely by fuel cells. Notably, in the last few years, scientific publications and applications that use fuel cells in small UAVs have increased significantly. Concurrently with developments in small UAVs, companies such as Honeywell [22], ZEROe [23], Cranfield Aerospace Solutions [24], ZEROAVIA [25], Rolls Royce [26, 27], Skyleader 150UL [28], and H2FLY [29] have initiated numerous projects related to fuel cell-powered large-scale aircraft. However, fuel cells are mostly used in hybrid systems in aircraft due to their shortage (as well as research gaps) listed below. These hybrid systems are mostly created with batteries, but there are also examples of hybridisation with jet engines [30]. The following key challenges are highlighted:

- Low power density: Fuel cells have lower power density compared to batteries. The power density of PEMFC, SOFC and DMFC stacks is typically less than 800 W/kg [31, 32]. For this reason,

they may be insufficient, especially in flight phases that require high-demand power, such as take-off and sudden manoeuvres.

- Storage of hydrogen: Hydrogen can be utilised in aviation as *LiquidH$_2$* and *GasH$_2$*. Although the energy density of *LH$_2$* is approximately three times higher than that of *GH$_2$*, *LH$_2$* must be stored at a cryogenic temperature of 20 K. On the other hand, *GH$_2$* requires a storage pressure of 300–800 bar, whereas *LH$_2$* is stored at just two bar [33, 34]. In other words, both forms of hydrogen contain significant storage and handling challenges that must be addressed for aviation applications.

- Gravimetric energy density: Currently, the power-to-mass ratio of commercially available PEM fuel cells for small-scale applications ranges from 200 to 1,000 W/kg, while the energy-to-mass ratio ranges from 200 to 2000 Wh/kg [35]. Since they have a direct impact on an aircraft's payload capacity and flight duration, these factors ought to be developed jointly.

- Start-up delay: The relatively short start-up time of PEMFCs is one of the factors that make them superior to DMFCs and SOFCs in small UAVs [36]. The Ref. [37] stated that a PEMFC requires 25 minutes to reach its optimal operating temperature. The start-up delay of fuel cells under varying operating conditions in UAVs is a critical performance metric that requires thorough examination [38, 39].

- Low dynamic response time: Aircraft exhibit more variable demand power than on-road and marine vehicles. Therefore, the dynamic response times of the fuel cells must be minimised in their aircraft propulsion system. The EaPP and EMS algorithms of hydrogen-powered UAVs should consider the impact of altitude on the fuel cell's response time.

- Altitude effect: Altitude is a key parameter that directly influences fuel cell output power [40]. Therefore, the impact of altitude changes on fuel cell performance and the corresponding fuel cell control mechanisms should be considered in the design of fuel cell-powered UAVs. In the dynamic model established in the Ref. [41], as the altitude increases from 0 to 4,000 m, the decline rate in output power of the PEMFC is 4.7%.

- Degradation and aging time: Fuel cell aging and lifetime are critical factors, especially in aircraft that perform consecutive missions (e.g., urban air mobility). Therefore, predicting parameters such as aging, output power, state of health and remaining useful life for fuel cells is necessary for the safe operation of aircraft [42].

Due to the shortcomings described above, fuel cells are often integrated with batteries in the propulsion systems of small UAVs. In this way, hybrid systems that utilise a fuel cell as the primary power source and batteries as an auxiliary source significantly improve flight time and range compared to battery-only systems. However, such propulsion systems with multiple energy sources have a more complex structure and require an energy management unit and energy-aware path planner.

1.2 Overview of energy management in UAVs

Hybrid propulsion-powered UAVs need a suitable energy management system for efficient, sustainable, and safe flight operations. An energy management system facilitates efficient allocation of the aircraft's demand power among the energy components, hence ensuring the safe flight of the vehicle. In addition, managing and controlling the aging and degradation of the energy components in the hybrid power system is the responsibility of the energy management unit. Energy management algorithms are classified into three main groups: rule-based, optimisation-based and learning-based. The shortcomings in energy management of UAVs with hybrid propulsion systems are listed below.

- Real-time applicability: The first active energy management application in a hybrid UAV was achieved by Bohwa Lee et al. in 2014 [43]. Since then, due to the low computational burden in energy management applications, rule-based algorithms have received the majority of attention

in actual flight research, with algorithms that rely on learning and optimisation receiving less attention.

- Computational burden: The computational burden of the energy management algorithm directly affects its real-time applicability [32]. All rule-based energy management algorithms are deterministic and have a low computational burden [44]. Among the optimisation-based ones, equivalent consumption minimisation strategy (ECMS) and model predictive control (MPC) may have low computational burden. Similarly, fuzzy logic (FL) may have a low computational burden in the intelligent-based ones [44].

- Optimality and robustness: The development of hybrid algorithms may lead to more optimal and robust energy management. For example, the Ref. [45] uses FL together with the rule-based energy management algorithm to increase its robustness. Similarly, in the Ref. [46], the GA and the rule-based algorithm are used together to increase robustness and optimality.

- Efficiency: The efficiency of the energy management algorithm can be defined as the ratio of the demand power of the UAV to the total power provided by the energy components [47]. As the efficiency of the energy management algorithm increases, fuel consumption (possibly hydrogen) decreases. Thus, future works should focus on high-efficiency algorithms for low fuel consumption.

- Considering degradation and aging: Ensuring the safe flight of unmanned aerial vehicles (UAVs) requires monitoring the health status of energy components in their power system. Thus, health status parameters such as RUL, SOH, SOC, MOT and EOL should be considered in energy management algorithms. Additionally, to improve resistance against aging and degradation of energy components, power sharing in a hybrid system should consider these indicators.

- Considering path planning: Studies in the literature consider mostly the energy management of UAVs with all-electric hybrid propulsion systems independently of path planning. However, a more realistic approach would be to consider together energy management with a path-planning algorithm that includes the dynamic structure of energy sources to guarantee high-energy-efficiency autonomous flight by reducing fuel consumption. Although few studies have focused on this point in recent years (example:(48–50), there is still a research gap about coordinated controller algorithms for hydrogen-powered UAVs.

In conclusion, numerous simulations and real-time flight-based research have been carried out since the first active energy management algorithm was successfully implemented in a hydrogen-powered UAV in 2014 [43]. However, by taking into account the highlighted important points, future research should look into energy-aware path planning in the energy management of hydrogen-powered UAVs. The safe and efficient flight of a UAV with a hybrid propulsion system depends on cooperative algorithms that take path planning into account. Furthermore, these cooperative algorithms guarantee the UAV's autonomous flight.

1.3 Overview of path planning algorithms

The structural complexity of hybrid systems combining hydrogen fuel cells and batteries adds complexity to the UAV's electronic architecture. This often results in trade-offs between energy capacity, range and payload, requiring adaptive path-planning strategies that consider these limitations. Additionally, for autonomous flights, hydrogen-powered UAVs should have an energy management controller in addition to an energy-aware path planning controller. Path planning tasks in UAVs can be defined as determining the path and motion of a UAV from a starting point to a final point under certain objectives. These objectives generally include minimum energy, time, path length and collision avoidance. The main challenges on UAV path planning tasks are optimum path length, optimality, completeness, cos-efficiency, time-efficiency, energy efficiency, safety, robustness and collision avoidance [51]. These challenges can vary according to the mission of the UAV. For example, the algorithm to be applied for path planning
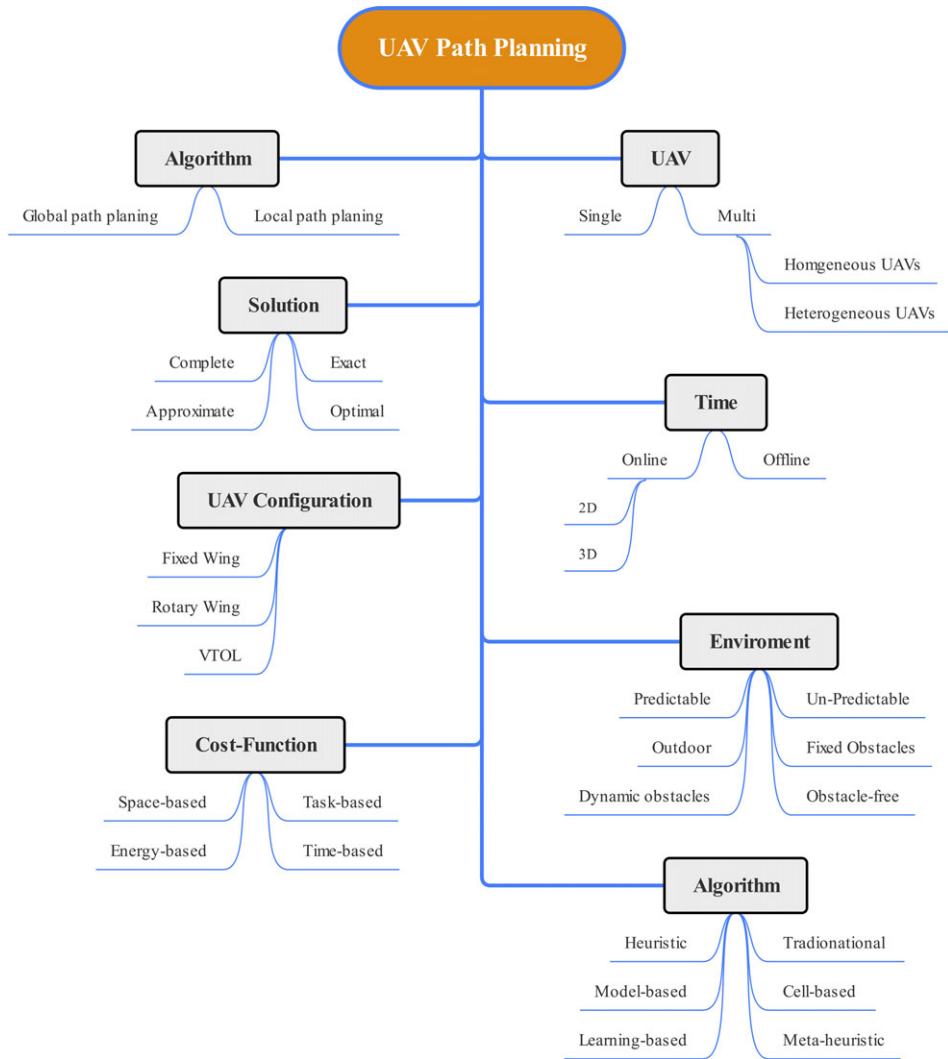
Figure 2. *The classification of UAV path planning.*

may depend on whether the obstacles in the environment are fixed or dynamic, the objective function, and the UAV type. However, any path planning algorithm must meet criteria such as stealth, physical feasibility, performance of mission, safety and real-time implementation [52]. Figure 2 shows the classification of UAV path planning algorithms. The shortcomings in the path planning of UAVs with hybrid propulsion systems are listed as considering energy management, energy-aware path planning, multiple UAV communications and real-time applicability.

1.4 Motivation and scope of the paper

UAV flight time is limited by the power-energy densities that can be achieved with current battery technology. Fuel cells can be considered as a solution. However, fuel cells are usually used in hybrid propulsion systems with batteries rather than alone because of their low power density, slow response time and start-up delay. The challenge of managing the power flow emerges in these hybrid systems. Many energy-power management algorithms have been developed in the literature to deal with this problem. At the same time, many review papers focused on this challenge have been published in recent
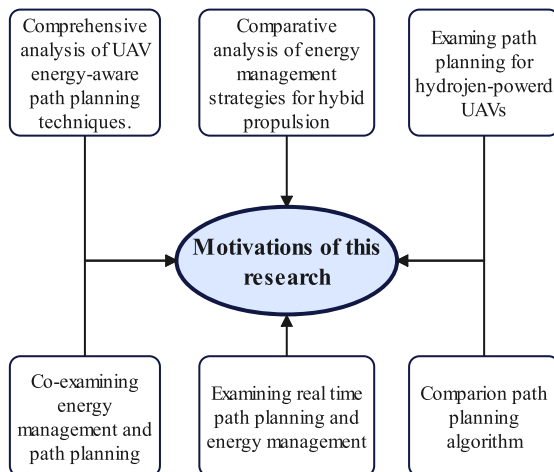
Figure 3. *The motivations for this study.*

years. However, to the best of our knowledge, no review paper deals with jointly the energy management and path planning of UAVs with hybrid power systems. This is the first motivation of this study.

Path planning algorithms in UAVs intensively deal with finding optimum path length, path conflict, optimality, completeness, cost-efficiency, time efficiency, energy efficiency, robustness, collision avoidance, safety, real-time applicability and multi-UAVs. Among these challenges, energy-aware path planning is even more important for UAVs with hybrid power systems because limited energy must be used most efficiently. Since there are not many studies on energy-aware path planning in UAVs, more research is needed. To sum up, this constitutes the second motivation of this study. Furthermore, the third motivation for this study is to investigate energy-aware path planning in hydrogen-based hybrid propulsion systems. Figure 3 summarises the motivations of this study.

1.5 Contribution and content of the paper

This paper aims to review studies on energy-aware path planning as well as to consider energy management and path planning together for hydrogen-powered hybrid UAVs. To the best of our knowledge, no comprehensive review study discusses energy-aware path planning for hybrid-powered UAVs, even though many studies separately take path planning or energy management for UAVs into consideration. So, this study addresses path planning and energy management in hybrid UAVs together for the first time as a review study. As a result, this study contributes to developing energy-aware path-planning algorithms and considering path planning together with energy management in hybrid UAVs. The main contributions of this study are as follows:

- This study discusses thoroughly energy-aware path planning algorithms for small unmanned aerial vehicles with hydrogen-powered hybrid propulsion.
- This study considers both energy management and path planning for small UAVs with hybrid propulsion systems.
- The algorithms used for energy management and path planning of hydrogen-powered hybrid propulsion small UAVs are compared, and research gaps are presented.
- It assesses the limitations in energy management, hydrogen propulsion, and energy-aware path planning for small UAVs and offers thorough suggestions for future research.
- By assessing current technologies, it investigates the electrical system components of small UAVs powered by hydrogen.

- It evaluates the application examples and usage areas of small UAVs with hydrogen-powered propulsion systems.
- It contrasts top producers of hydrogen-powered small UAVs and fuel cell technology.
- This study compares fuel cell-powered hybrid system topologies by giving examples of their application.

In summary, this study provides a comprehensive review of the existing literature on energy management and energy-aware path planning in hydrogen-powered UAVs. Thus, it is expected to contribute to the development of adaptive energy-aware path planning algorithms that incorporate energy management for hydrogen-powered UAVs.

2.0 Current review studies

Since this paper advocates the combined consideration of hydrogen-based propulsion and path planning to increase the flight time and payload capacity of UAVs, review papers on these topics are mentioned in this section.

2.1 On the path planning

Table 1 summarises the most prominent review papers on the path planning of UAVs. Accordingly, these review studies are compared in terms of whether they address the topics of energy-aware operation, comparing applications, suggesting future research direction, discussing challenges and including UAV system description. Among these, in Refs [53, 54], the topic of energy awareness in path planning of UAVs is slightly touched upon, but to the best of our knowledge, no review paper has considered energy-aware path planning in fuel cell-powered UAVs.

Many significant review papers have been published on path planning for UAVs. For example, Ref. [55] has emphasised that there are research gaps in online path planning, energy-efficient path planning, multiple UAVs communication, path planning in complex environments, implementing UAVs in other fields, increasing storage capacity in multi-spectral UAVs and mesh of drones. In Ref. [56], the authors present a systematic literature review comparing 90 publications obtained with autonomous, path planning and UAV keywords in terms of 20 parameters. Reference (52) presents a review examining 231 studies on computational-intelligence-based path planning of UAVs in terms of time domain and environment model. Reference (57) categorised path planning algorithms for UAVs into five main categories: classical methods, heuristics, meta-heuristics, machine learning and hybrid algorithms, and presents a comparative review study. In Ref. [58], the authors present a systematic review of meta-heuristic-based path planning. Reference (59) provides a comprehensive review of artificial intelligence methods applied in path planning for UAVs, categorising them into four groups: reinforcement learning (RL) techniques, evolutive computing techniques, swarm intelligence techniques and graph neural networks (GNN). Reference (60) has conducted a detailed comparative study on region coverage-aware unmanned aerial route planning considering a three-dimensional environment and dynamic coverage. Reference (61) classifies innovative path-planning algorithms and discusses their implementation challenges, advantages and disadvantages. In Ref. [54], the authors have divided path planning algorithms into two general categories, classical and reinforcement and have conducted a comparative review of these two groups.

2.2 On the hydrogen-powered propulsion

Table 2 compares the review papers on energy management and fuel cell technology of hydrogen-powered unmanned aerial vehicles. This comparison is based on the topics; the path planning, energy management, UAV system components and hybrid typologies, hydrogen storage technologies and

Table 2. Comparison of existing review studies on hydrogen-powered UAVs

Ref., Year	Highlights	1	2	3	4	5
2014 [63]	Evaluation of hydrogen technology for fixed-wing UAVs	–	–	–	✓	✓
2017 [64]	Future work recommendations on hydrogen-powered UAVs	–	–	✓	✓	✓
2019 [44]	Comparsion of energy management strategies	–	✓	✓	–	✓
2019 [32]	UAV applications and comparison of EMSs	–	✓	✓	✓	–
2020 [65]	Detail evaluation of hybrid topologies	–	✓	✓	✓	✓
2020 [66]	Hybrid topologies	–	✓	–	✓	–
2020 [67]	Detailed comparison of energy sources for UAVs	–	✓	✓	✓	–
2022 [62]	Classification UAVs and evaluation hybrid propulsion	✓	✓	–	✓	–
2022 [68]	Evaluation of EMS and design procedure	–	✓	✓	✓	✓
2023 [69]	Comparison of hydrogen power UAVs and classification of EMS	–	✓	✓	✓	–
This paper	Energy-aware and hydrogen-based hybrid propulsion	✓	✓	✓	✓	–

The header for the last five columns is "Components[a]".

[a]Remark for the column of components the listed review studies incorporate/compare: 1 - path planning, 2 - energy management, 3 - UAV system component and hybrid typologies, 4 - hydrogen storage technologies, 5 - conceptual design for hybrid propulsion.
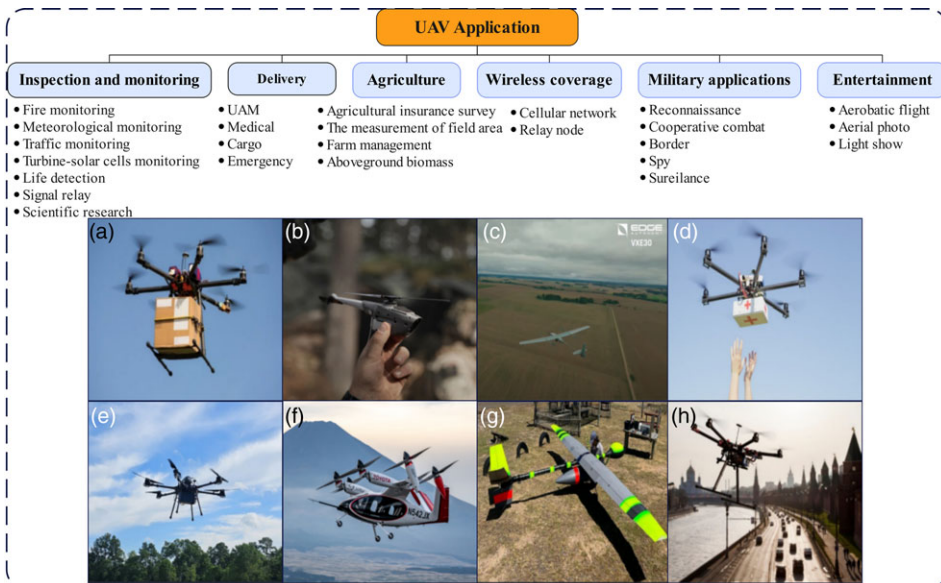

Figure 4. UAV application areas and some examples of hydrogen-powered UAVs. a: delivery, b: spy, c: agriculture, d: emergency, e: inspection and surveying, f: UAM, g: agriculture, deployment of biocontrols, h: inspection. (adapted from Refs [32, 62, 68] (pictures for Refs [32, 32, 73–77]).

conceptual design for hybrid propulsion. None of these review studies has addressed the topic of energy-aware path planning in detail, except for the suggestions for future works in Ref. [62]. As mentioned in the Ref. [62], energy management and path planning should be investigated together to improve the limited flight time of unmanned aerial vehicles.

3.0 Applications for hydrogen-based uavs

Small UAVs are currently a commercialised product used in many military and civilian areas. As UAVs' payload capacity and flight durability increase, their usage will also increase simultaneously [15, 19, 70]. To improve these UAV characteristics, fuel cell hybridisation or only fuel cell-powered propulsion has increased the use of unmanned aerial vehicles in civil and military applications. In addition to flight

Table 3. *Examples of fuel cell-powered commercialised UAVs*

Name	Storage[a]	Mass[b]	Type	Mission	Time[c]	Ref.
Global Observer	L	1805kg	FW	Surveillance	168 hours	[78]
HyFly H510	–	75 kg	VTOL	Delivery	–	[79]
DS30W	C	24.9 kg	RW	Monitoring	120 min.	[80]
DJ25	C	31 kg	FW	Monitoring	330 min.	[81]
DT30	C	24.9	RW	Monitoring	150 min	[82]
VXE30	–	22 kg	VTOL	Multi mission	8 h	[83]
MMC H1	–	–	RW	Multi mission	4 h	[84]
Griflion H	–	–	FW	Multi mission	15 h	[84]
H2D250	–	50 kg	VTOL	Monitoring	8 h	[85]
H2D200	–	35 kg	VTOL	Monitoring	4 h	[85]
HD255	–	29.5	RW	Delivery	90 min.	[85]
Cellen	C	20 kg	RW	Monitoring	3 h	[73]
Hylium	L	20 kg	RW	Inspection	7 h	[73]
GAOTek-203	C	2 kg	RW	Education	–	[86]
Dragonfly V	C	70 kg	FW	Agriculture	1 h	[73]

[a]L: liquid, C: compressed; [b]Take-off mass; [c]Estimated flight time

durability, the level of autonomy of UAVs is another characteristic that directly affects the intensity of their use [71]. With advances in autonomy, we may run into the use of small UAVs in many new areas.

The applications of small unmanned aerial vehicles can be broadly classified as inspection and monitoring, delivery, agriculture, wireless coverage, military and entertainment. Figure 4 summarises the leading commercial applications of fuel cell-powered unmanned aerial vehicles with their mission. In (72) Refs [69] comprehensive reviews of the literature on fuel cell-powered UAVs are provided.

With the developments in energy storage and transform areas in recent years, hydrogen-based UAVs have now become commercial. The leading ones are shown in Table 3. They participate mostly in delivery, education, surveillance, inspection, agriculture and monitoring. Hydrogen-based propulsion is not limited to small UAVs but is now a potential solution to fossil fuels for aircraft of all sizes. Hydrogen-based propulsion systems are being designed for passenger transport, especially in urban air mobility. For example, the VTOL aircraft called AMSL Vertiia made its first flight in 2024 and has a range of up to 1,000 km. Additionally, the tilt-wing type hydrogen-powered eVTOL vehicle that Joby developed for UAM has completed successfully flight tests.

Table 4 lists leading fuel cell producers for small unmanned aerial vehicles. This table only lists companies that produce fuel cells for small UAVs. Among these, intelligent energy offers air-cooled fuel cells in three different capacities named IR-SOAR 800, IE-SOAR 1.2 and IE-SOAR 2.4. These fuel cell module masses (excluding tank) are 1,450, 2,700, and 4,800 grams, respectively. Also, they operate between −5 and 40 °C degrees and can robustly provide energy up to 3,000 m altitude. Using the IE-SOAR 800, a maximum flight time of 15.6 hours was achieved in an unmanned aerial vehicle with a total take-off mass of 7.4 kg. The operating voltage range of the IE-SOAR 800 is 24–48 V, while the other two fuel cells are 50–70 V. Another leading fuel cell manufacturer is Horizon Fuel Cell Technologies, and Its subsidiary for small UAVs is H3 dynamics, which manufactures Aerocell 300–4000 air-cooled PEM fuel cells in various power capacities. The masses of these fuel cells range from 0.72 kg to 6 kg. Their specific power and power density of them are 550 W/kg and 230 W/L, respectively. Combining these fuel cells with suitable batteries can create hybrid power systems. For example, Doosan is a company that offers such a hybrid system. Doosan offers powerpack products called DP30M2S, DM30M2S and DM 15, which include the air-cooled fuel cell and the battery. Their masses are 6.9 kg, 11.1 kg and 8 kg, respectively, and the first two of them are designed for rotary-wing UAVs and the third for fixed-wing UAVs. The rated powers of these power packs are 2.7 kW, 2.7 kW and 1.25 kW, respectively. Also,

Table 4. List of leading manufacturers of fuel cell-based power banks for UAVs

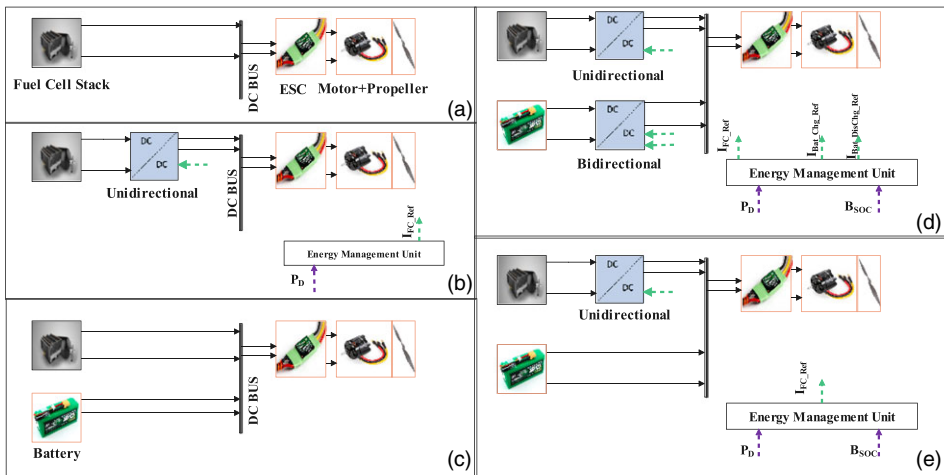| Name	Location	Fuel Cell Type	Capacity Range	Ref.
Intelligent Energy	UK	AC-PEMFC	0.8–2.4 kW	[87]
H3 Dynamics (Horizon)	Singapore	AC-PEMFC	0.3–4 kW	[88]
Doosen	South Korea	AC/LC-PEMFC	1–3 kW	[89]
Honeywell	USA	LC-PEMFC	06–1.2 kW	[90]
Ballard	Canada	LC-PEMFC	06–1.2 kW	[91]
Spectronic	Singapore	AC-PEMFC	1–3 kW	[92]
EnergyOr(Plug Power)	USA	LC-PEMFC	–	[93]

Figure 5. Fuel cell powered propulsion system topologies (a and c: passive control b, d, and e: active control).

Doosen is studying liquid-cooled fuel cell systems. Finally, Honeywell has two water-cooled fuel cell packs with masses of 1.8 kg and 4 kg and continuous output powers of 600 W and 1,200 W.

4.0 Hybrid topologies and components of small uavs

4.1 Hybrid topologies of fuel cell powered UAVs

The UAVs generally use three different types of fuel cells: PEMFC, SOFC and DMFC. Especially in small-type unmanned aerial vehicles, PEMFCs are mostly preferred due to their low operation temperature and relatively high energy density. The restrictions to implementing PEMFCs alone in a propulsion system are mentioned in the introduction section of this study. These restrictions can be addressed by creating hybrid power systems, where batteries serve as the secondary energy source and fuel cells serve as the main energy source. Although the literature contains examples of hybrid systems that combine fuel cells with solar cells and supercapacitors, fuel cells are typically used in conjunction with batteries. Solar cells are only suitable for unmanned aerial vehicles with large wing areas. The configurations of hybrid system topologies with multiple energy components in this way are summarised in detail in Refs [44, 65, 69]. This study only considers hybrid power systems that include batteries and fuel cells. These hybrid system topologies are given in Fig. 5. Also, Table 5 evaluates fuel cell-driven power systems and prominent literature examples (only experimental ones).

In Fig. 5, the topologies a and c drive directly the motor without any control. Whereas, in topologies b, d and e, active energy management is applied by controlling the energy components with the help of

Table 5. *Comparison of fuel cell-based hybrid topologies and application examples*

Topology identifier	Description	Examples
a	Only fuel cell-powered propulsion	[95–97]
b	Active controlled propulsion powered solely by fuel cells	[98, 99]
c	Hybrid propulsion without active control	[100, 101]
d	Hybrid propulsion with fully active control	[102–107]
e	Hybrid propulsion with semi-active control	[108, 109]

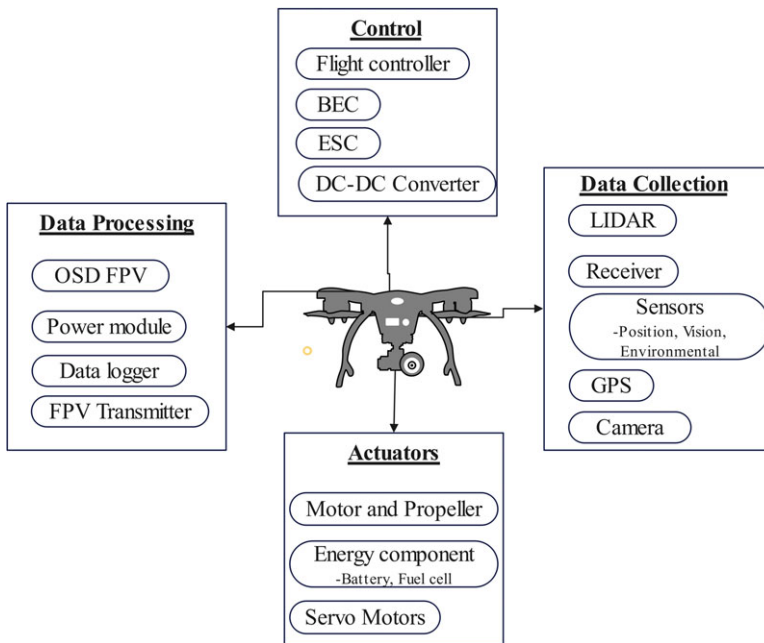(a and c: passive control b, d, and e: active control).

Figure 6. *Categorisation of electronic components for fixed and rotary wing UAVs.*

DC/DC converters. Although not included in Fig. 5, there are hybrid system studies consisting of SOFC and TIG/TEG in the literature [94]. However, these studies are only simulation studies. This hybrid system may be handled in future studies.

4.2 Components

Based on their wing configuration, UAVs are divided into three primary types: fixed-wing, rotary-wing and VTOL systems. Despite differences in aerodynamic design and propulsion mechanisms, all three types contain fundamental electronic components essential for navigation, communication, energy management, and control.

The avionics of UAVs can be broadly classified into several subsystems, including flight control systems, computing, communication, sensory, power, navigation and positioning [110]. Figure 6 categorises these components, while Fig. 7 illustrates a typical configuration for a fixed-wing UAV with a single motor. Fixed-wing UAVs often utilise a single electric motor for propulsion, but multi-motor configurations are also employed to enhance redundancy, energy efficiency and manoeuvrability.
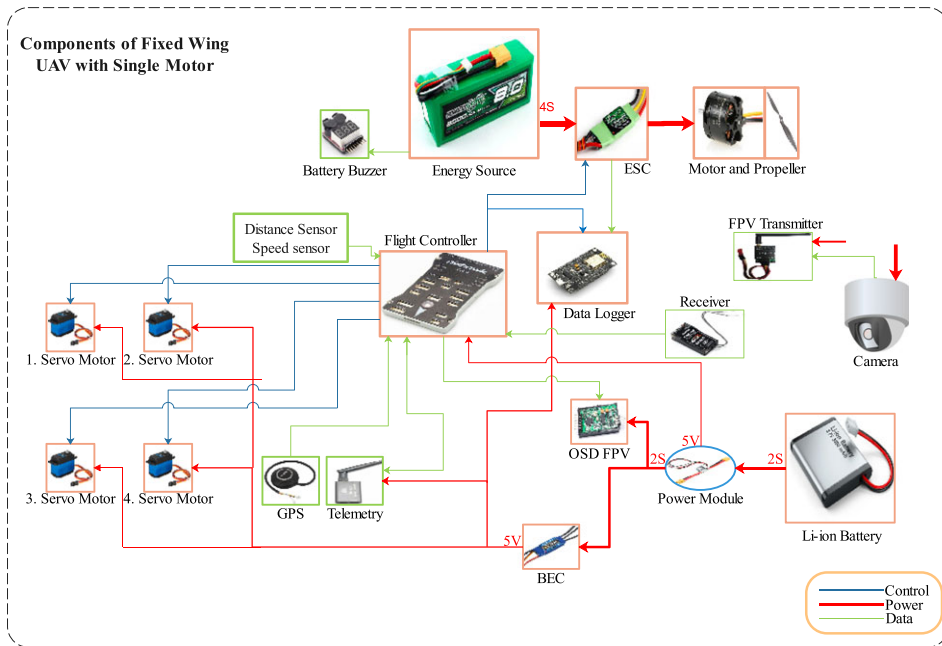
Figure 7. *Electronic equipment of a small fixed-wing UAV with a single motor.*

In contrast, VTOL UAVs rely on multiple motors for hover and cruise, necessitating more complex motor control electronics and energy distribution systems.

Recent developments in embedded systems facilitate real-time energy-aware path planning, especially in hybrid propulsion systems that combine diverse energy sources like fuel cells, lithium-ion batteries, solar cells and supercapacitors [111]. These systems depend on high-performance flight controllers, such as the Holybro Pixhawk 6X and Cube, which combine STM32H7 microcontrollers with fast processors able to calculate power consumption and the best way to distribute energy in real-time. With DC/DC converters, power sharing between energy sources in hybrid propulsion systems can be achieved (manufacturers including Vicor, Current Logic, Texas Instruments and Linear Technologies) [112]. Also, the combined operation of EMS and BMS, capable of continuously measuring voltage, current and temperature enables high energy efficiency.

Real-time energy-aware path planning relies on advanced sensors that measure flight dynamics characteristics, environmental conditions and power characteristics on the relevant platform to determine trajectories while aiming to minimise energy consumption. High-accuracy inertial measurement units (IMUs) such as VectorNav VN-200 combined with RTK-GNSS modules such as Septentrio's AsteRx-m3 and Ublox ZED-F9P provide centimeter-level positioning accuracy that allows for precise flight path corrections depending on atmospheric and terrain conditions. Moreover, advanced wind speed and air pressure sensors can detect environmental conditions that can impact excessive power consumption. Optical and LiDAR-based systems enable terrain-adaptive path planning, reducing power consumption by dynamically adjusting altitude and route selection. To process these complex real-time energy-aware path planning calculations, UAVs integrate AI-driven edge computing platforms like the NVIDIA Jetson Xavier NX and Qualcomm RB5, which execute reinforcement learning algorithms to predict the most energy-efficient flight routes. This is critical for UAVs with hybrid propulsion systems, whereby AI-aided decision-making helps dynamically allocate power between primary and auxiliary energy sources, optimising endurance while maintaining mission performance.

5.0 Energy-aware path planning for uavs

The purpose of this section is twofold, i.e. while discussing on energy-aware path planning approaches, it includes insights on the relationship of such techniques with UAV configuration (e.g. fixed-wing, VTOL, etc.).

The path planning term does not only comprise finding the shortest and optimal path but also safe flight by considering collision-free and energy awareness. The key terms motion planning, trajectory planning, and navigation are also directly related to path planning [51]. All of these terms are a measure of autonomy for UAVs and should be considered together in fully autonomous systems [113]. The Refs [56, 114] divide the autonomy of UAVs into four levels: remotely controlled systems, automated systems, autonomous non-learning systems and autonomous learning systems. An important factor in achieving completely autonomous UAV flights is path planning algorithms. They are generally classified as traditional, mathematical models, machine-learning-based, meta-heuristics and hybrid algorithms. Figure 8 illustrates a general classification of the UAV path planning algorithms.

Figure 8 classifies established path planning approaches from the current literature, each of the approaches having its unique characteristics. The listed approaches are compared and evaluated in Refs [54, 57, 58, 61]. Traditional path planning algorithms, such as A∗ and Dijkstra, are easy to implement and provide optimal solution in only static environments with simple obstacles yet suffering from high computational costs and poor performance when employed for dynamic and complex environments [57]. Meta-heuristic algorithms generally exhibit easy implementation and scalability for complex environments but lack guaranteed optimality assurance and require parameter tuning [115]. Machine learning-based methods provide optimal and reasonable results for dynamic environments and dynamic changes, albeit ML methods require extensive training, normally high-computational burden, and use of appropriate datasets. The more (analytical) mathematical approaches, like mixed-integer linear programming (MILP) and MPC, exhibit effective control and robustness but can be difficult to implement and normally require a model that can be complex (to encapsulate the required system information) and struggle with real-time execution [61]. While meta-heuristic and ML-based approaches are more effective in dynamic, complex environments and when considering uncertainties, traditional and mathematical methods are best suited for static environments. In addition, the selection of suitable algorithms depends on several factors, including the UAV's wing configuration, mission requirements, propulsion type, adaptability to dynamic conditions, computational requirements, real-time applicability. Hybrid methods, such as the combination of MPC with RL, can balance real-time adaptability with optimal energy efficiency [116–118].

The main topics in path planning of UAVs are as follows: optimum path length, optimality, completeness, cost-efficiency, time efficiency, energy efficiency, robustness and collision avoidance. Since the path planning of a UAV depends on its mission, one or more of these main topics may be considered together in a certain mission. Given that UAVs' flight duration and range are restricted by the energy components' limited capacity, energy-aware path planning is a crucial research topic. Consequently, the energy-aware path planning topic has attracted great attention in the literature. Many studies deal with this topic in battery-based small UAVs.

The energy-aware path planning studies of small UAVs are compared in Table 6. Studies of energy-aware path planning for small UAVs are usually simulation-based, as shown in Table 6. To our knowledge, no experimental energy-aware path planning study has been conducted for small UAVs powered by hydrogen, despite recent years seeing the development of experimental energy-aware path planning for battery-only small UAVs. Also, energy management and energy-aware path planning should be considered together for safe and efficient flight in hybrid propulsion-powered UAVs. Figure 9 illustrates a coordinated control technique that considered together the energy-aware path planning and energy management for a hybrid propulsion-powered UAV. The connection between energy management and energy-aware path planning is the power consumption of the UAV. In simulation-based studies, the power consumption of UAVs can be determined by creating a multi-physics model (model-based method). Or, an approximate power consumption can be determined by considering the UAV's flight
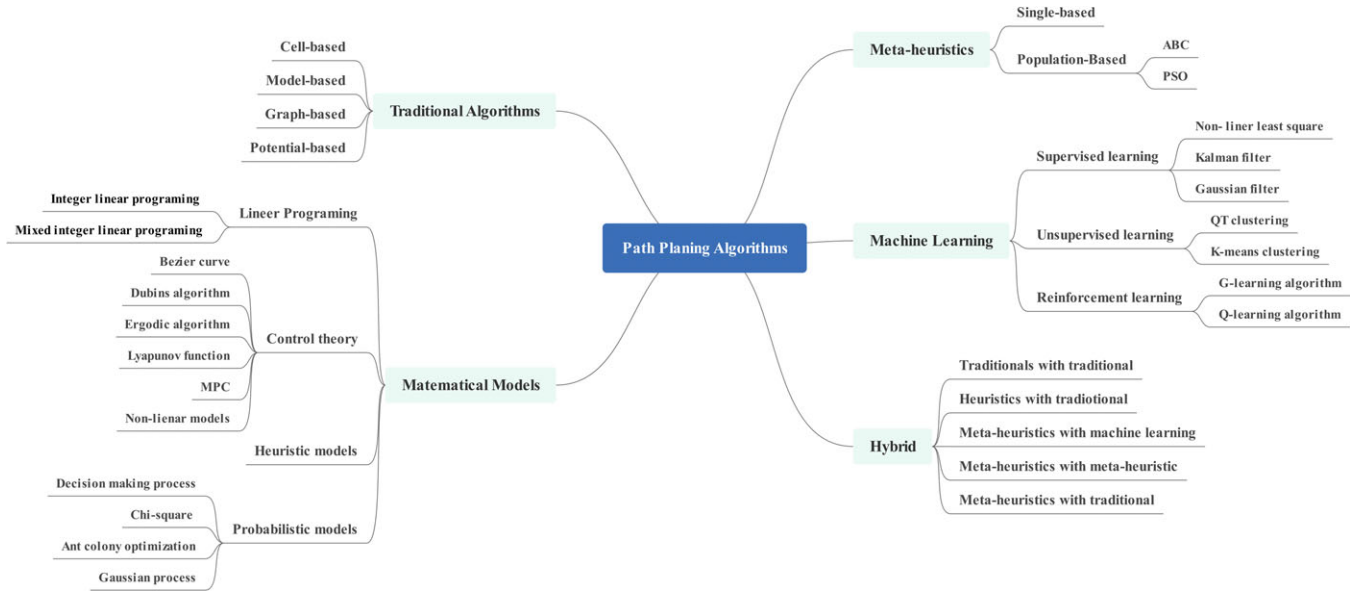
Figure 8. *Classification of the path planning algorithms for UAVs (adapted from Refs [51, 56]).*

Table 6. *Comparison of energy-aware path planning studies for small UAV*

Ref.	Highlights	Algorithm	Exp./Sim.[a]	UAV	Components[b]				
					1	2	3	4	5
[119]	GNSS-denied	RRT*	Sim.	RW	√	–	√	–	–
[120]	Power consumption improvement	Q-learning and SARSA	Sim.	RW	–	–	√	–	–
[121]	Drag coefficient	Q-learning & SARSA	Sim.	RW	√	–	√	–	–
[122]	Decrease energy consump., multi-physics	PID	Both	RW	–	–	–	√	√
[123]	Terrain environment	I-PSO	Sim.	RW	√	–	√	√	–
[124]	Consider wind model	A-Star	Sim.	RW	√	–	–	–	√
[125]	Novel power model	DPA	Sim.	RW	√	–	√	√	√
[126]	Onboard	RL	Sim.	RW	√	√	√	√	√
[127]	Low computational burden	3D-OGSE	Sim.	RW	√	–	–	–	√
[128]	Velocity based energy consumption	mCPP	Both	RW	–	√	–	–	√
[129]	EM^2CPP	BICC	Sim.	RW	√	√	√	–	–
[130]	A partitioning method	Grid based technique	Sim.	RW	–	–	√	–	–
[131]	EAOA	Grid-Based	Sim.	RW	√	–	√	–	–
[132]	Energy model based velocities	BaFA	Both	RW	–	–	–	√	√
[133]	GNSS-denied and spatiotemporal wind	Energy-Aware GPP	Sim	RW	√	–	–	–	–
[134]	Energy consumption model	E-Spiral	Sim	RW	–	–	√	–	–
[135]	Dynamic model	MPC	Sim	RW	√	–	–	√	–
[49]	Dynamic model, hybrid propulsion	HMPC	Sim. HILS	RW	–	–	√	√	–
[136]	Unknown dynamic threats	EEA*	Sim.	FW	√	–	–	–	√
[137]	Non-uniform wind field	RRT*	Sim.	FW	√	–	–	–	–
[138]	Minumum fuel consumption	GA	Sim.	FW	–	–	√	√	–
[139]	Mission based	PRM*	Sim.	FW	–	–	√	√	–
[140]	Multi objective	MO–GA*	Sim.	FW	–	–	√	√	–
[48]	Convex optimisation	FNNSCP*	Sim. HILS	FW	–	–	√	√	√
[14]	Swarm	AFP-PSO	Sim.	RW	–	√	√	–	–
[141]	Coupled model	Dynamic Opt.	Sim.	FW	–	–	–	√	–
[50]	Increase endurance	MPC	Sim. HILS	RW	–	–	√	√	–
[142]	Propose a partitioning method	PPS	Sim.	RW	√	–	√	–	–

[a]Exp.: Experimental, Sim. : Simulation, HILS: Hardware-in-the-loop simulation

[b]Remark for the column of components the listed review studies incorporate/compare: 1 - Collision avoidance, 2 - multi-UAV, 3 - Comparison of studies, 4 - multi-physics, and 5 - real-time applicable and reliability.
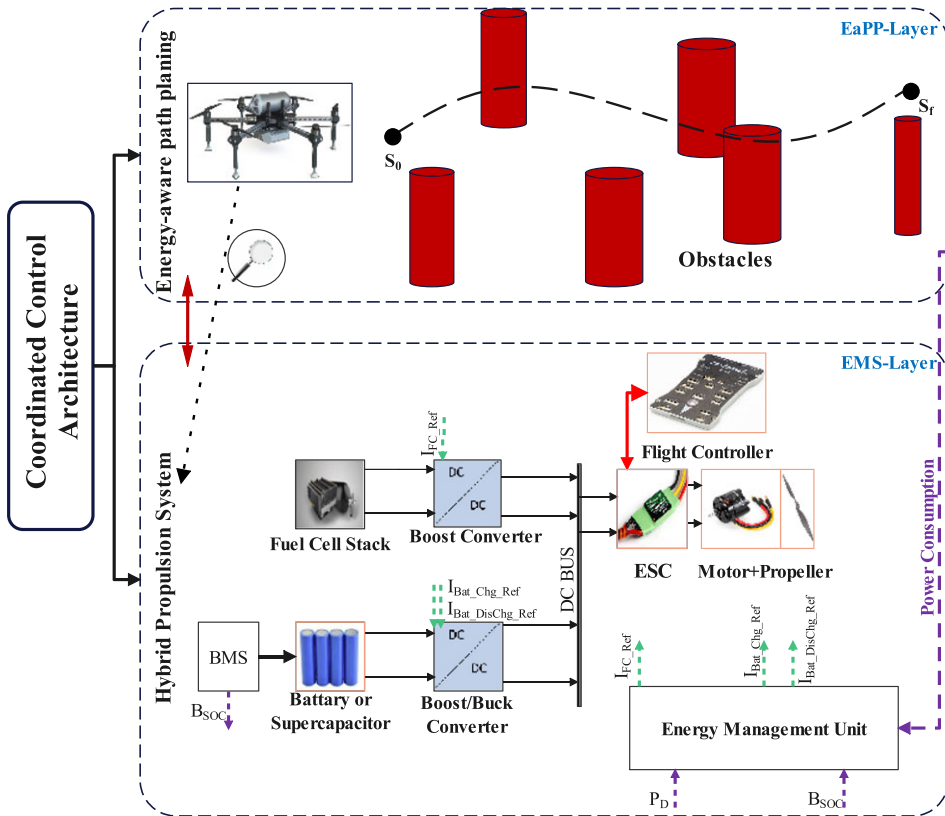
Figure 9. *Structure of energy-aware path planning of a small UAV with a hybrid propulsion system.*

speed. However, actual flight tests (data-driven approach) can be used to estimate UAV power consumption. After determining the UAV power consumption, an energy-aware path planning algorithm can be implemented considering energy management. Here, the energy-aware algorithm can minimise the power consumption of the UAV and also take into account the health status parameters of its propulsion system components. In other words, energy-aware path planning covers all issues related to the power and health status of the propulsion system.

Since fixed-wing, VTOL, and rotary-wing UAVs operate under distinct flight conditions, their energy-aware path-planning algorithms have different characteristics in terms of power consumption. Fixed-wing UAVs, benefiting from higher lift forces than rotary-wing UAVs due to their fixed wings, have greater flight endurance but require a steady altitude and speed, necessitating smooth trajectories without sudden manoeuver changes [57, 143]. In contrast, rotary- wing UAVs are characterised by hovering and high manoeuverability, leading to greater energy demands, while tilt-wing and tilt-rotor VTOL UAVs incorporate complex transitioning mechanisms between vertical and horizontal flight [144]. Given these variations in UAV types, energy-aware path planning should account for UAV-specific power consumption behaviour influenced by factors such as flight speed, altitude, manoeuverability, acceleration and trajectory requirement. For a fixed-wing UAV, path-planning algorithms should focus on optimising altitude, utilising gliding for energy efficiency, leveraging wind assistance, minimising sharp turns and optimising waypoints [145]. In rotary-wing UAVs, reducing hover time, mitigating wind resistance and optimising manoeuvering are essential, whereas in VTOL UAVs, efficient mode transitioning, minimising vertical flight phases and maximising cruise efficiency should be targeted. Since fuel cells have

a lower power density, they may limit the UAV's manoeuvering capabilities and require smoother trajectories. This highlights the necessity of a joint analysis of path planning and energy management for hydrogen-powered UAVs.

6.0 Challenges and recommendations for future work

The most popular research topics in the literature on unmanned aerial vehicle path planning include complex environments, multiple UAV communication, real-time path planning and hybrid path planning algorithms. The main challenge in real-time path planning is the computational burden of the algorithms. As hardware technology develops, the number of real-time path-planning applications in UAVs will increase. In general, Veroni diagram (VD), rapidly exploring random tree (RRT), Q learning algorithm and particle swarm optimisation (PSO) algorithms are used in real-time path planning because they provide low computational burden [146]. Since many missions, such as surveillance and inspection, require multiple UAVs, the path planning topic for multiple UAVs is important [147]. The multiple UAVs can be homogeneous or heterogeneous. Path-planning based on time or energy minimisation and communication of UAVs are among the trending research topics in multiple UAV path planning. Also, the complex environment is one of the difficulties in the path planning of UAVs [148]. Although some simulation studies use fixed obstacles and 2D environments to test path-planning algorithms, the research challenges are on dynamic obstacles and 4D (time, x, y, z) environments. Hybrid path-planning algorithms have been developed in recent years to improve the computational burden, robustness, convergence and completion properties of path algorithms [149]. Especially, new hybrid algorithms have been developed using meta-heuristics algorithms and machine learning algorithms [150, 151].

The trend research topics and future work recommendations briefly summarised above also are valid for the topic of energy-aware path-planning of UAVs, as they take into account the general path planning of UAVs. In addition, the specific future work recommendations for energy-aware path planning of UAVs are given below:

- Considering multi-physics: In simulation-based energy-aware path planning studies of UAVs, the power consumption of the UAV is carried out either by the speed of the vehicle or by simple equations. To the best of the authors' knowledge, only few studies considered energy-aware path-planning have considered the multi-physics of the UAV by modelling the dynamics of the battery, ESC, propeller and rigid body of the UAV in the literature [122, 152, 153]. In particular, considering the multi-physics in energy-aware path planning studies of fuel cell-powered UAVs are even more important (due to the nonlinear structure of fuel cells), and it can be said that new studies are needed in the literature on this topic.

- Considering energy management: Although various studies consider the energy management of hydrogen-propelled UAVs, to the authors' best knowledge, only four studies in the current literature address energy management and path planning together [48, 49, 154, 155]. In this review study the path planning of UAVs with hybrid propulsion systems supports the view of considering these simultaneously with energy management to facilitate more efficient and sustainable operations. Furthermore, the path planning of UAVs with hybrid propulsion systems has not received much attention in the literature. Therefore, energy management and energy-aware path planning of UAVs with hybrid propulsion systems should be considered together to guarantee safer and more efficient flights.

- Considering multi-cost function: The path planning studies mostly consider one objective. These objectives may be energy efficiency, time, shortest path length, etc. For example, energy-aware path planning studies are given in Table 6. Similarly, some studies consider the minimisation of time and path length. Depending on the mission of the UAV, it may be necessary to develop path-planning algorithms that take several of these into account. Therefore, it can be said that

according to the mission of the UAV, path-planning algorithms that take into account multiple objectives should be developed.

- <u>Considering altitude's effect on the performance of the fuel cells</u>: The changes in air temperature and pressure with altitude change directly affect the performance of the fuel cells [41, 156]. Therefore, the altitude effect should be included in the energy-aware path planning of fuel-cell-powered UAVs. For this reason, the fuel cell performance due to altitude change should be examined, and an energy-aware path planning algorithm should be developed accordingly.

- <u>Considering the aging of energy components</u>: Although many studies discuss the estimation, modelling and monitoring of parameters such as RUL and SOH of batteries or fuel cells in UAVs, very few studies consider these health indicators together with path planning [157–159]. Especially in UAM vehicles that perform delivery and transportation, continuous monitoring of SOH and RUL state parameters is important for a safe and efficient flight [160]. In this context, SOH and RUL parameters of propulsion system energy components (battery or fuel cell) should be included in energy-aware path-planning studies of UAVs.

- <u>Structural complexity of hybrid systems</u>: Although low hydrogen has a volumetric energy density, onboard hydrogen storage has challenges with aerodynamic efficiency and take-off mass [161]. Aerodynamic efficiency relates to the lift-drag ratio. The on-board hydrogen storage effect has negative effects on the aerodynamic efficiency of UAVs because it decreases the lift-drag ratio. Therefore, aerodynamically efficient designs of rotary-wing hydrogen-powered UAVs contain a research gap. Additionally, considering the time-varying wind and speed, aerodynamically efficient path-planning algorithms need to be developed [162]. In fixed-wing UAVs, the hydrogen tank is placed inside the fuselage and is therefore less affected by aerodynamics than in rotary-wing UAVs. However, the air intake design for fuel cell ventilation must be taken into account [108]. As a result, there is a need for designs that address aerodynamic efficiency and path planning together in both UAV types [163].

7.0 Conclusion

This paper provides a timely and comprehensive review of energy-aware path planning for hydrogen-powered UAVs, a rapidly developing research field with significant potential. While battery-powered UAVs have received considerable attention in energy-aware path planning research, the unique characteristics of hydrogen fuel cell-powered UAVs necessitate a more dedicated investigation. This is where our study strongly contributes by establishing a clear baseline for future research in this domain. We comprehensively analyse the current state-of-the-art in hydrogen-powered UAV technology, including fuel cell systems, energy management strategies and relevant hybrid propulsion topology advancements. In addition, the study systematically reviews existing energy-aware path planning algorithms, comparing them across key parameters, i.e., path length, optimality, completeness, cost efficiency, time efficiency, energy efficiency, robustness and collision avoidance capability.

Unlike current review papers existing in the literature, this paper explicitly identifies key research gaps to guide future research investigations to unlock the full potential of hydrogen-powered UAVs for long-endurance and sustainable applications. These gaps, detailed in Section 4.1, highlight the need for studies that: (i) integrate energy management strategies; (ii) incorporate multi-physics and multi-cost functions; and (iii) analyse the impact of altitude on fuel cell performance. By addressing these gaps, future research can handle energy-aware path planning for UAVs.

References

[1] Wandelt, S., Wang, S., Zheng, C. and Sun, X. Aerial: a meta review and discussion of challenges toward unmanned aerial vehicle operations in logistics, mobility, and monitoring, *IEEE Trans. Intell. Transport. Syst.*, 2023, **25**, (7), pp 6276–6289.

[2] Sabour, M., Jafary, P. and Nematiyan, S. Applications and classifications of unmanned aerial vehicles: a literature review with focus on multi-rotors, *Aeronaut. J.*, 2023, **127**, (1309), pp 466–490.

[3] Salinas, J.C. and Lewandowski, T. Blue unmanned aircraft systems explained: the current drone market, flight regulations, and debunking common misconceptions, *Transport. Res. Record*, 2024, **0** (0), p 03611981241257509.

[4] Milidonis, K., Eliades, A., Grigoriev, V. and Blanco, M. Unmanned aerial vehicles (UAVs) in the planning, operation and maintenance of concentrating solar thermal systems: a review, *Solar Energy*, 2023, **254**, pp 182–194.

[5] Messaoudi, K., Oubbati, O.S., Rachedi, A., Lakas, A., Bendouma, T. and Chaib, N., A survey of UAV-based data collection: challenges, solutions and future perspectives, *J. Netwk. Comput. Appl.*, 2023, **216**, p 103670.

[6] Mohsan, S.A.H., Othman, N.Q.H., Li, Y., Alsharif, M.H. and Khan, M.A., Unmanned aerial vehicles (UAVs): practical aspects, applications, open challenges, security issues, and future trends, *Intell. Service Robot.*, 2023, **16**, (1), pp 109–137.

[7] Ghamari, M., Rangel, P., Mehrubeoglu, M., Tewolde, G.S. and Sherratt, R.S. Unmanned aerial vehicle communications for civil applications: a review, *IEEE Access*, 2022, **10**, pp 102492–102531.

[8] Alghamdi, Y., Munir, A. and La, H.M. Architecture, classification, and applications of contemporary unmanned aerial vehicles, *IEEE Consumer Electron. Mag.*, 2021, **10**, (6), pp 9–20.

[9] Chamola, V., Kotesh, P., Agarwal, A., Gupta, N., Guizani, M., et al., A comprehensive review of unmanned aerial vehicle attacks and neutralization techniques, *Ad hoc Netwk.*, 2021, **111**, p 102324.

[10] Mitridis, D., Kapsalis, S., Terzis, D. and Panagiotou, P. An evaluation of fixed-wing unmanned aerial vehicle trends and correlations with respect to NATO classification, region, EIS date and operational specifications, *Aerospace*, 2023, **10**, (4), p 382.

[11] Hassanalian, M. and Abdelkefi, A. Classifications, applications, and design challenges of drones: a review, *Prog. Aerosp. Sci.*, 2017, **91**, pp 99–131.

[12] Coopmans, C., Slack, S., Schwemmer, N., Vance, C., Beckwith, A. and Robinson, D.J. Greatblue: a 55-pound vertical-takeoff-and-landing fixed-wing SUAS for science; systems, communication, simulation, data processing, payloads, package delivery, and mission flight performance, *J. Intell. Robot. Syst.*, 2024, **110**, (3), p 98.

[13] Mus, J., Madhav, D., Vanierschot, M., Vandeginste, V. and Buysschaert, F. A review of the impact of ambient conditions and degradation in hybrid fuel cell powered unmanned aerial vehicles, *J. Power Sources*, 2024, **624**, p 235571.

[14] Huang, S., Zhang, H. and Huang, Z. Energy efficient and cooperative collision avoidance for UAV swarms with trajectory prediction, *IEEE Trans. Intell. Transport. Syst.*, 2024, **25**, (7), pp 6951–6963.

[15] Mariscal, G., Depcik, C., Chao, H., Wu, G. and Li, X. Technical and economic feasibility of applying fuel cells as the power source of unmanned aerial vehicles, *Energy Convers. Manag.*, 2024, **301**, p 118005.

[16] Aminudin, M., Kamarudin, S., Lim, B., Majilan, E., Masdar, M. and Shaari, N. An overview: current progress on hydrogen fuel cell vehicles, *Int. J. Hydrogen Energy*, 2023, **48**, (11), pp 4371–4388.

[17] Alpaslan, E., Karaoğglan, M.U. and Colpan, C.O. Investigation of drive cycle simulation performance for electric, hybrid, and fuel cell powertrains of a small-sized vehicle, *Int. J. Hydrogen Energy*, 2023, **48**, (99), pp 39497–39513.

[18] Rehan, M., Akram, F., Shahzad, A., Shams, T. and Ali, Q. Vertical take-off and landing hybrid unmanned aerial vehicles: an overview, *Aeronaut. J.*, 2022, **126**, (1306), pp 2017–2057.

[19] Huang, X., Li, Y., Ma, H., Huang, P., Zheng, J. and Song, K. Fuel cells for multirotor unmanned aerial vehicles: a comparative study of energy storage and performance analysis, *J. Power Sources*, 2024, **613**, p 234860.

[20] Kiesewetter, L., Shakib, K.H., Singh, P., Rahman, M., Khandelwal, B., Kumar, S. and Shah, K. A holistic review of the current state of research on aircraft design concepts and consideration for advanced air mobility applications, *Prog. Aerosp. Sci.*, 2023, **142**, p 100949.

[21] Ahluwalia, R., Peng, J.-K., Wang, X., Papadias, D. and Kopasz, J. Performance and cost of fuel cells for urban air mobility, *Int. J. Hydrogen Energy*, 2021, **46**, (74), pp 36917–36929.

[22] Honeywell. https://aerospace.honeywell.com/us/en/about-us/press-release/2023/01/honeywell-launches-disruptive-research-on-hydrogen-fuel-cells-for-aircraft, accessed: 2.11.2024.

[23] Zeroe. https://www.airbus.com/en/innovation/energy-transition/hydrogen/zeroe, accessed: 2.11.2024.

[24] Cranfield. https://cranfieldaerospace.com/hydrogen-aircraft-technology-overview-cranfield-aerospace/, accessed: 2.11.2024.

[25] AVA. https://zeroavia.com/, accessed: 2.11.2024.

[26] Rolls Royce. https://www.rolls-royce.com/innovation/alternative-fuels/hydrogen.aspx, accessed: 2.11.2024.

[27] Jupp, J., The design of future passenger aircraft–the environmental and fuel price challenges, *Aeronaut. J.*, 2016, **120**, (1223), pp 37–60.

[28] Romeo, G. and Borello, F. Design and realisation of a two-seater aircraft powered by fuel cell electric propulsion, *Aeronaut. J.*, 2010, **114**, (1155), pp 281–297.

[29] H2Fly. https://www.h2fly.de/2023/09/07/h2fly-and-partners-complete-worlds-first-piloted-flight-of-liquid-hydrogen-powered-electric-aircraft/, accessed: 2.11.2024.

[30] Santin, M., Traverso, A. and Massardo, A. Technological aspects of gas turbine and fuel cell hybrid systems for aircraft: a review, *Aeronaut. J.*, 2008, **112**, (1134), pp 459–467.

[31] Yin, C., Hua, S., Nie, W., Yang, H. and Tang, H. Comparative study on air-cooled fuel cell stacks with metal and graphite bipolar plate designs for unmanned aerial vehicles, *eTransportation*, 2024, **21**, p 100344.

[32] Boukoberine, M.N., Zhou, Z. and Benbouzid, M. A critical review on unmanned aerial vehicles power supply and energy management: solutions, strategies, and prospects, *Appl. Energy*, 2019, **255**, p 113823.

[33] Adler, E.J. and Martins, J.R. Hydrogen-powered aircraft: fundamental concepts, key technologies, and environmental impacts, *Prog. Aerosp. Sci.*, 2023, **141**, p 100922.

[34] Franke, F., Kazula, S. and Enghardt, L. Elaboration and outlook for metal hydride applications in future hydrogen-powered aviation, *Aeronaut. J.*, 2024, **128**, (1325), pp 1501–1531.

[35] Oh, T.H. Conceptual design of small unmanned aerial vehicle with proton exchange membrane fuel cell system for long endurance mission, *Energy Convers. Manag.*, 2018, **176**, pp 349–356.

[36] Bayrak, Z.U., Kaya, U. and Oksuztepe, E. Investigation of PEMFC performance for cruising hybrid powered fixed-wing electric UAV in different temperatures, *Int. J. Hydrogen Energy*, 2020, **45**, (11), pp 7036–7045.

[37] Kim, H., Oh, T.H. and Kwon, S. Simple catalyst bed sizing of a nabh4 hydrogen generator with fast startup for small unmanned aerial vehicles, *Int. J. Hydrogen Energy*, 2016, **41**, (2), pp 1018–1026.

[38] Huang, Z., Shen, J., Chan, S.H. and Tu, Z. Transient response of performance in a proton exchange membrane fuel cell under dynamic loading, *Energy Convers. Manag.*, 2020, **226**, p 113492.

[39] Amamou, A., Kandidayeni, M., Boulon, L. and Kelouwani, S. Real time adaptive efficient cold start strategy for proton exchange membrane fuel cells, *Appl. Energy*, 2018, **216**, pp 21–30.

[40] González-Espasandín, Ó., Leo, T.J., Raso, M.A. and Navarro, E. Direct methanol fuel cell (DMFC) and h2 proton exchange membrane fuel (PEMFC/h2) cell performance under atmospheric flight conditions of unmanned aerial vehicles, *Renew. Energy*, 2019, **130**, pp 762–773.

[41] Gong, C., Xing, L., Liang, C. and Tu, Z. Modeling and dynamic characteristic simulation of air-cooled proton exchange membrane fuel cell stack for unmanned aerial vehicle, *Renew. Energy*, 2022, **188**, pp 1094–1104.

[42] Ebner, K. and Koops, L. Potentials of prognostics and health management for polymer electrolyte fuel cells in aviation applications, *Aircr. Eng. Aerosp. Technol.*, 2022, **94**, (9), pp 1481–1490.

[43] Lee, B., Kwon, S., Park, P. and Kim, K. Active power management system for an unmanned aerial vehicle powered by solar cells, a fuel cell, and batteries, *IEEE Trans. Aerosp. Electron. Syst.*, 2014, **50**, (4), pp 3167–3177.

[44] Tao, L., Zhou, Y., Zicun, L. and Zhang, X. State of art on energy management strategy for hybrid-powered unmanned aerial vehicle, *Chin. J. Aeronaut.*, 2019, **32**, (6), pp 1488–1503.

[45] Lei, T., Wang, Y., Jin, X., Min, Z., Zhang, X. and Zhang, X. An optimal fuzzy logic-based energy management strategy for a fuel cell/battery hybrid power unmanned aerial vehicle, *Aerospace*, 2022, **9**, (2), p 115.

[46] Boukoberine, M.N., Donateo, T. and Benbouzid, M., Optimized energy management strategy for hybrid fuel cell powered drones in persistent missions using real flight test data, *IEEE Transact. Energy Convers.*, 2022, **37**, (3), pp 2080–2091.

[47] Quan, R., Li, Z., Liu, P., Li, Y., Chang, Y. and Yan, H. Minimum hydrogen consumption-based energy management strategy for hybrid fuel cell unmanned aerial vehicles using direction prediction optimal foraging algorithm, *Fuel Cells*, 2023, **23**, (2), pp 221–236.

[48] Tian, W., Zhang, X., Yang, D., et al., Double-layer fuzzy adaptive NMPC coordinated control method of energy management and trajectory tracking for hybrid electric fixed wing UAVs, *Int.J. Hydrogen Energy*, 2022, **47**, (92), pp 39239–39254.

[49] Yao, Y., Wang, J., Zhou, Z., Li, H., Liu, H. and Li, T. Grey Markov prediction-based hierarchical model predictive control energy management for fuel cell/battery hybrid unmanned aerial vehicles, *Energy*, 2023, **262**, p 125405.

[50] Liu, H., Yao, Y., Wang, J., Qin, Y. and Li, T. A control architecture to coordinate energy management with trajectory tracking control for fuel cell/battery hybrid unmanned aerial vehicles, *Int. J. Hydrogen Energy*, 2022, **47**, (34), pp 15236–15253.

[51] Aggarwal, S. and Kumar, N. Path planning techniques for unmanned aerial vehicles: a review, solutions, and challenges, *Comput. Commun.*, 2020, **149**, pp 270–299.

[52] Zhao, Y., Zheng, Z. and Liu, Y. Survey on computational-intelligence-based UAV path planning, *Knowl.-Based Syst.*, 2018, **158**, pp 54–64.

[53] Fevgas, G., Lagkas, T., Argyriou, V. and Sarigiannidis, P. Coverage path planning methods focusing on energy efficient and cooperative strategies for unmanned aerial vehicles, *Sensors*, 2022, **22**, (3), p 1235.

[54] Mannan, A., Obaidat, M.S., Mahmood, K., Ahmad, A. and Ahmad, R. Classical versus reinforcement learning algorithms for unmanned aerial vehicle network communication and coverage path planning: a systematic literature review, *Int. J. Commun. Syst.*, 2023, **36**, (5), p e5423.

[55] Shahid, N., Abrar, M., Ajmal, U., Masroor, R., Amjad, S. and Jeelani, M. Path planning in unmanned aerial vehicles: an optimistic overview, *Int. J. Commun. Syst.*, 2022, **35**, (6), p e5090.

[56] ul Husnain, A., Mokhtar, N., Mohamed Shah, N., Dahari, M. and Iwahashi, M. A systematic literature review (slr) on autonomous path planning of unmanned aerial vehicles," *Drones*, 2023, **7**, (2), p 118.

[57] Ait Saadi, A., Soukane, A., Meraihi, Y., Benmessaoud Gabis, A., Mirjalili, S. and Ramdane-Cherif, A. UAV path planning using optimization approaches: a survey, *Arch. Comput. Methods Eng.*, 2022, **29**, (6), pp 4233–4284.

[58] Yahia, H.S. and Mohammed, A.S. Path planning optimization in unmanned aerial vehicles using meta-heuristic algorithms: a systematic review, *Environ. Monit. Assess.*, 2023, **195**, (1), p 30.

[59] Puente-Castro, A., Rivero, D., Pazos, A. and Fernandez-Blanco, E. A review of artificial intelligence applied to path planning in UAV swarms, *Neural Comput. Appl.*, 2022, **34**, (1), pp 153–170.

[60] Kumar, K. and Kumar, N. Region coverage-aware path planning for unmanned aerial vehicles: a systematic review, *Phys. Commun.*, 2023, **59**, p 102073.

[61] Luo, J., Tian, Y. and Wang, Z. Research on unmanned aerial vehicle path planning, *Drones*, 2024, **8**, (2), p 51.

[62] Zhang, C., Qiu, Y., Chen, J., Li, Y., Liu, Z., Liu, Y., Zhang, J. and Hwa, C.S. A comprehensive review of electrochemical hybrid power supply systems and intelligent energy managements for unmanned aerial vehicles in public services, *Energy AI*, 2022, **9**, p 100175.

[63] Gong, A. and Verstraete, D. Fuel cell propulsion in small fixed-wing unmanned aerial vehicles: current status and research needs, *Int. J. Hydrogen Energy*, 2017, **42**, (33), pp 21311–21333.

[64] Pan, Z., An, L., and Wen, C. Recent advances in fuel cells based propulsion systems for unmanned aerial vehicles, *Appl. Energy*, 2019, **240**, pp 473–485.

[65] Wang, B., Zhao, D., Li, W., Wang, Z., Huang, Y., You, Y. and Becker, S. Current technologies and challenges of applying fuel cell hybrid propulsion systems in unmanned aerial vehicles, *Prog. Aerosp. Sci.*, 2020, **116**, p 100620.

[66] Duy, V.N. and Kim, H.-M. Review on the hybrid-electric propulsion system and renewables and energy storage for unmanned aerial vehicles, *Int. J. Electrochem. Sci.*, 2020, **15**, (6), pp 5296–5319.

[67] Townsend, A., Jiya, I.N., Martinson, C., Bessarabov, D. and Gouws, R., A comprehensive review of energy sources for unmanned aerial vehicles, their shortfalls and opportunities for improvements, *Heliyon*, 2020, **6**, (11), e05285.

[68] Xu, L., Huangfu, Y., Ma, R., Xie, R., Song, Z., Zhao, D., Yang, Y., Wang, Y. and Xu, L. A comprehensive review on fuel cell UAV key technologies: propulsion system, management strategy, and design procedure, *IEEE Trans. Transport. Electrif.*, 2022, **8**, (4), pp 4118–4139.

[69] Çnar, H., Kandemir, I. and Donateo, T. Current technologies and future trends of hydrogen propulsion systems in hybrid small unmanned aerial vehicles, *Hydrogen Electr. Veh.*, 2023, pp 75–109.

[70] Marqués, R., Montero, Á., Sánchez-Diaz, C. and Quintanilla, I. Design methodology and simulation analysis of hybrid fuel cell and battery systems for powering unmanned aircraft systems, *Energy Convers. Manag.*, 2024, **306**, p 118303.

[71] Mahmoud Zadeh, S., Powers, D.M. and Bairam Zadeh, R. *Autonomy and unmanned vehicles*, Cognitive Science and Technology, Springer, Singapore, **116**, 2019.

[72] Oladosu, T.L., Pasupuleti, J., Kiong, T.S., Koh, S.P.J. and Yusaf, T. Energy management strategies, control systems, and artificial intelligence-based algorithms development for hydrogen fuel cell-powered vehicles: a review, *Int. J. Hydrogen Energy*, 2024, **61**, pp 1380–1404.

[73] H3dy. https://www.h3dynamics.com/, accessed: 28.09.2024.

[74] Cai, G., Dias, J. and Seneviratne, L. A survey of small-scale unmanned aerial vehicles: recent advances and future development trends, *Unmann. Syst.*, 2014, **2**, (02), pp 175–199.

[75] Edgeautonomy. https://edgeautonomy.io/, accessed: 03.02.2025.

[76] Joby. https://www.jobyaviation.com/, accessed: 03.02.2025.

[77] FLIR. https://www.flir.co.uk/, accessed: 03.02.2025.

[78] Globalobserver. https://www.airforce-technology.com/projects/globalobserverunmann/, accessed: 28.09.2024.

[79] HyFly510. https://www.hyfly.tech/hyfly-h510/, accessed: 28.09.2024.

[80] Doosands30 UAV. https://www.doosanmobility.com/en/products/drone-ds30, accessed: 28.09.2024.

[81] Doosandsdj25 UAV. https://www.doosanmobility.com/en/products/drone-dj25, accessed: 28.09.2024.

[82] Doosan Company. https://www.doosanmobility.com/en/products/drone-dt30, accessed: 28.09.2024.

[83] Edge Autonomy. https://edgeautonomy.io/, accessed: 28.09.2024.

[84] MMCH. https://www.mmcuav.com/, accessed: 28.09.2024.

[85] Heven Drones. https://hevendrones.com/, accessed: 28.09.2024.

[86] Gao tek. https://gaotek.com/, accessed: 01.11.2024.

[87] Intelligent Energy Company. https://www.intelligent-energy.com/, accessed: 18.09.2024.

[88] Horizon fuel cell technologies company. https://www.horizonfuelcell.com/, accessed: 18.09.2024.

[89] Doosan Mobility Innovation Company. https://www.doosanmobility.com/en, accessed: 18.09.2024.

[90] Honeywell Aerospace Technologies. https://aerospace.honeywell.com/, accessed: 18.09.2024.

[91] Ballard Company. https://www.ballard.com/, accessed: 18.09.2024.

[92] Spectronik Company. https://www.spectronik.com/, accessed: 18.09.2024.

[93] Energyor Company. http://www.energyor.com/, accessed: 18.09.2024.

[94] Ren, X. Assessment and conceptual design of a SOFC/TIG/TEG-based hybrid propulsion system for a small UAV, *Int. J. Energy Res.*, 2022, **46**, (10), pp 13336–13355.

[95] Ward, T.A. and Jenal, N. Design and initial flight tests of a hydrogen fuel cell powered unmanned air vehicle (UAV), *ECS Trans.*, 2010, **26**, (1), p 433.

[96] Gavrilovic, N., Leng, Y. and Moschetta, J.-M. Thermal control of a hydrogen-powered Uncrewed aerial vehicle for crossing the Atlantic ocean, *Aerosp. Sci. Technol.*, 2024, **155**, p 109667.

[97] Kang, K., Park, S., Cho, S.-O., Choi, K. and Ju, H. Development of lightweight 200-w direct methanol fuel cell system for unmanned aerial vehicle applications and flight demonstration, *Fuel Cells*, 2014, **14**, (5), pp 694–700.

[98] Kim, T. and Kwon, S. Design and development of a fuel cell-powered small unmanned aircraft, *Int. J. Hydrogen Energy*, 2012, **37**, (1), pp 615–622.

[99] Kwon, S.-M., Kim, M.J., Kang, S. and Kim, T. Development of a high-storage-density hydrogen generator using solid-state nabh4 as a hydrogen source for unmanned aerial vehicles, *Appl. Energy*, 2019, **251**, p 113331.

[100] Verstraete, D., Gong, A., Lu, D.D.-C. and Palmer, J.L. Experimental investigation of the role of the battery in the aerostack hybrid, fuel-cell-based propulsion system for small unmanned aircraft systems, *Int. J. Hydrogen Energy*, 2015, **40**, (3), pp 1598–1606.

[101] Yang, C., Moon, S. and Kim, Y. A fuel cell/battery hybrid power system for an unmanned aerial vehicle, *J. Mech. Sci. Technol.*, 2016, **30**, pp 2379–2385.

[102] Boukoberine, M.N., Zia, M.F., Benbouzid, M., Zhou, Z. and Donateo, T. Hybrid fuel cell powered drones energy management strategy improvement and hydrogen saving using real flight test data, *Energy Convers. Manag.*, 2021, **236**, p 113987.

[103] Erdör Türk, B., Sarul, M.H., Çengelci, E., et al. Integrated process control-power management system design and flight performance tests for fuel cell powered mini-unmanned aerial vehicle, *Energy Technol.*, 2021, **9**, (3), p 2000879.

[104] Apeland, J., Pavlou, D.G. and Hemmingsen, T. Sensitivity study of design parameters for a fuel cell powered multirotor drone, *J. Intell. Robot. Syst.*, 2021, **102**, (1), p 6.

[105] Ma, R., Song, J., Zhang, Y., Zhang, H. and Yuan, M. Lifetime-optimized energy management strategy for fuel cell unmanned aircraft vehicle hybrid power system, *IEEE Trans. Ind. Electron.*, 2022, **70**, (9), pp 9046–9056.

[106] Zhang, Y., Zhang, Y., Ma, R., Zhou, Y., Zhao, D. and Li, Y. An online energy management strategy based on SOC fluctuation optimization for fuel cell UAV, *IEEE Trans. Transport. Electrificat.*, 2023, **10**, (2), pp 3105–3113.

[107] De Wagter, C., Remes, B., Smeur, E., van Tienen, F., Ruijsink, R., van Hecke, K. and van der Horst, E. The nederdrone: a hybrid lift, hybrid energy hydrogen UAV, *Int. J. Hydrogen Energy*, 2021, **46**, (29), pp 16003–16018.

[108] Özbek, E., Yalin, G., Ekici, S. and Karakoc, T.H. Evaluation of design methodology, limitations, and iterations of a hydrogen fuelled hybrid fuel cell mini UAV, *Energy*, 2020, **213**, p 118757.

[109] Arat, H.T. and Sürer, M.G. Experimental investigation of fuel cell usage on an air vehicle's hybrid propulsion system, *Int. J. Hydrogen Energy*, 2020, **45**, (49), pp 26370–26378.

[110] Osmani, K. and Schulz, D. Comprehensive investigation of unmanned aerial vehicles (UAVs): an in-depth analysis of avionics systems, *Sensors*, 2024, **24**, (10), p 3064.

[111] Hashim, H.A. Advances in UAV avionics systems architecture, classification and integration: a comprehensive review and future perspectives, *Results Eng.*, 2024, **25**, p 103786.

[112] Martinez-Heredia, J.M., Colodro, F., Mora-Jiménez, J.L., Remujo, A., Soriano, J. and Esteban, S. Development of GAN technology-based DC/DC converter for hybrid UAV, *IEEE Access*, 2020, **8**, pp 88014–88025.

[113] De Ruiter, A. and Owlia, S. Autonomous obstacle avoidance for fixed-wing unmanned aerial vehicles, *Aeronaut. J.*, 2015, **119**, (1221), pp 1415–1436.

[114] Sepulveda, E. and Smith, H. Technology challenges of stealth unmanned combat aerial vehicles, *Aeronaut. J.*, 2017, **121**, (1243), pp 1261–1295.

[115] Hooshyar, M. and Huang, Y.-M. Meta-heuristic algorithms in UAV path planning optimization: a systematic review (2018–2022), *Drones*, 2023, **7**, (12), p 687.

[116] Choi, Y., Jimenez, H. and Mavris, D.N. Two-layer obstacle collision avoidance with machine learning for more energy-efficient unmanned aircraft trajectories, *Robot. Autonom. Syst.*, 2017, **98**, pp 158–173.

[117] Challita, U., Saad, W. and Bettstetter, C. Deep reinforcement learning for interference-aware path planning of cellular-connected UAVs, in *2018 IEEE International Conference on Communications (ICC)*, IEEE, Kansas City, MO, USA, 2018, pp 1–7.

[118] Shiri, H., Park, J. and Bennis, M. Remote UAV online path planning via neural network-based opportunistic control, *IEEE Wirel. Commun. Lett.*, 2020, **9**, (6), pp 861–865.

[119] Takemura, R. and Ishigami, G. Perception-and-energy-aware motion planning for UAV using learning-based model under heteroscedastic uncertainty, in *2024 IEEE International Conference on Robotics and Automation (ICRA)*, IEEE, 2024, pp 10103–10109.

[120] Niaraki, A., Roghair, J. and Jannesari, A. Energy-aware goal selection and path planning of UAV systems via reinforcement learning, *arXiv preprint*, 2019.

[121] Niaraki, A., Roghair, J. and Jannesari, A. Visual exploration and energy-aware path planning via reinforcement learning, *arXiv preprint arXiv:1909.12217*, 2019.

[122] Michel, N., Wei, P., Kong, Z. and Lin, X. Energy-optimal unmanned aerial vehicles motion planning and control based on integrated system physical dynamics, *J. Dyn. Syst. Meas. Control*, 2023, **145**, (4), p 041002.

[123] Na, Y., Li, Y., Chen, D., Yao, Y., Li, T., Liu, H. and Wang, K. Optimal energy consumption path planning for unmanned aerial vehicles based on improved particle swarm optimization, *Sustainability*, 2023, **15**, (16), p 12101.

[124] Rienecker, H., Hildebrand, V. and Pfifer, H. Energy optimal 3d flight path planning for unmanned aerial vehicle in urban environments, *CEAS Aeronaut. J.*, 2023, **14**, (3), pp 621–636.

[125] Hong, D., Lee, S., Cho, Y.H., Baek, D., Kim, J. and Chang, N. Least-energy path planning with building accurate power consumption model of rotary unmanned aerial vehicle, *IEEE Trans. Veh. Technol.*, 2020, **69**, (12), pp 14803–14817.

[126] Hong, D., Lee, S., Cho, Y.H., Baek, D., Kim, J. and Chang, N. Energy-efficient online path planning of multiple drones using reinforcement learning, *IEEE Trans. Veh. Technol.*, 2021, **70**, (10), pp 9725–9740.

[127] Zinage, V., Arul, S.H., Manocha, D. and Ghosh, S. 3d-ogse: Online safe and smooth trajectory generation using generalized shape expansion in unknown 3-d environments, *arXiv preprint arXiv:2005.13229*, 2020.

[128] Datsko, D., Nekovar, F., Penicka, R. and Saska, M. Energy-aware multi-UAV coverage mission planning with optimal speed of flight, *IEEE Robot. Automat. Lett.*, 2024, **9**, (3), pp 2893–2900.

[129] Shao, X.-X., Gong, Y.-J., Zhan, Z.-H. and Zhang, J. Bipartite cooperative coevolution for energy-aware coverage path planning of UAVs, *IEEE Trans. Artif. Intell.*, 2021, **3**, (1), pp 29–42.

[130] Ghaddar, A. and Merei, A. Energy-aware grid based coverage path planning for UAVs, in *Proceedings of the Thirteenth International Conference on Sensor Technologies and Applications SENSORCOMM*, Nice, France, 2019, pp 27–31.

[131] Ghaddar, A. and Merei, A. EAOA: energy-aware grid-based 3d-obstacle avoidance in coverage path planning for UAVs, *Future Internet*, 2020, **12**, (2), p 29.

[132] Di Franco, C. and Buttazzo, G. Energy-aware coverage path planning of UAVs, in 2015 *IEEE International Conference on Autonomous Robot Systems and Competitions*, IEEE, Vila Real, Portugal, 2015, pp 111–117.

[133] Takemura, R., Aoki, N. and Ishigami, G. Energy-and-perception-aware planning and navigation framework for unmanned aerial vehicles, *Adv. Mech. Eng.*, 2023, **15**, (4), p 16878132231169688.

[134] Cabreira, T.M., Di Franco, C., Ferreira, P.R. and Buttazzo, G.C. Energy-aware spiral coverage path planning for UAV photogrammetric applications, *IEEE Robot. Automat. Lett.*, 2018, **3**, (4,) pp 3662–3668.

[135] Santos, M.A., Ferramosca, A. and Raffo, G.V. Energy-aware model predictive control with obstacle avoidance, in *2021 International Conference on Unmanned Aircraft Systems (ICUAS)*, IEEE, Athens, Greece, 2021, pp 647–655.

[136] Aiello, G., Valavanis, K.P. and Rizzo, A. Fixed-wing UAV energy efficient 3d path planning in cluttered environments, *J. Intell. Robot. Syst.*, 2022, **105**, (3), p 60.

[137] Duan, Y., Achermann, F., Lim, J. and Siegwart, R. Energy-optimized planning in non-uniform wind fields with fixed-wing aerial vehicles, *arXiv preprint arXiv:2404.02077*, 2024.

[138] Zhou, M. and Prasad, J. 3d minimum fuel route planning and path generation for a fuel cell powered UAV, *Unmann. Syst.*, 2014, **2**, (01), pp 53–72.

[139] Wolsieffer, B. and Li, A.Q., Energy-aware path planning for fixed-wing seaplane UAVs, in *International Symposium on Experimental Robotics*, Springer, Cham, 2023, pp 438–449.

[140] Wang, H., Li, P., Xiao, H., Zhou, X. and Lei, R. Intelligent energy management for solar-powered unmanned aerial vehicle using multi-objective genetic algorithm, *Energy Convers. Manag.*, 2023, **280**, p 116805.

[141] Klesh, A. and Kabamba, P. Energy-optimal path planning for solar-powered aircraft in level flight, in *AIAA Guidance, Navigation and Control Conference and Exhibit*, AIAA, Hilton Head, South Carolina, US, 2007, p 6655.

[142] Ghaddar, A., Merei, A. and Natalizio, E., PPS: energy-aware grid-based coverage path planning for UAVs using area partitioning in the presence of NFZs, *Sensors*, 2020, **20**, (13), p 3742.

[143] Liao, S., Zhu, R., Wu, N., Shaikh, T., Sharaf, M. and Mostafa, A. Path planning for moving target tracking by fixed-wing UAV, *Defence Technol.*, 2020, **16**, (4), 811e24.

[144] Keller, J., Thakur, D., Likhachev, M., Gallier, J. and Kumar, V. Coordinated path planning for fixed-wing UAS conducting persistent surveillance missions, *IEEE Trans. Automat. Sci. Eng.*, 2016, **14**, (1), pp 17–24.

[145] Jafari, B., Saeedi, H. and Pishro-Nik, H. UAV path planning for surveillance applications: Rotary-wing vs. fixed-wing UAVs, in *2024 IEEE 99th Vehicular Technology Conference (VTC2024-Spring)*, IEEE, Singapore, 2024, pp 1–6.

[146] Vashisth, A., Batth, R.S. and Ward, R. Existing path planning techniques in unmanned aerial vehicles (UAVs): a systematic review, in *2021 International Conference on Computational Intelligence and Knowledge Economy (ICCIKE)*, IEEE, Dubai, UAE, 2021, pp 366–372.

[147] Shanmugavel, M., Tsourdos, A., White, B., and Żbikowski, R. Co-operative path planning of multiple UAVs using Dubins paths with clothoid arcs, *Control Eng. Pract.*, 2010, **18**, (9), pp 1084–1092.

[148] Zhao, M. M. unmanned aerial vehicle dynamic path planning in an uncertain environment [j], *Robotica*, 2015, **33**, (3), pp 611–621.

[149] Zhao, B., Huo, M., Li, Z., Yu, Z. and Qi, N. Clustering-based hyper-heuristic algorithm for multi-region coverage path planning of heterogeneous UAVs, 2024, *Neurocomputing*, **610**, p 128528.

[150] Yu, X. and Luo, W. Reinforcement learning-based multi-strategy cuckoo search algorithm for 3d UAV path planning, *Exp. Syst. Appl.*, 2023, **223**, p 119910.

[151] Tutsoy, O., Asadi, D., Ahmadi, K., Nabavi-Chashmi, S.Y. and Iqbal, J. Minimum distance and minimum time optimal path planning with bioinspired machine learning algorithms for faulty unmanned air vehicles, *IEEE Trans. Intell. Transport. Syst.*, 2024, **25**, (8), pp 9069–9077.

[152] Michel, N., Kong, Z. and Lin, X. Optimal control of a multirotor unmanned aerial vehicle based on a multiphysical model, in *Dynamic Systems and Control Conference*, American Society of Mechanical Engineers, Virtual, Online, 2020, 84287, p V002T36A004.

[153] Michel, N., Wei, P., Kong, Z., Sinha, A.K. and Lin, X. Modeling and validation of electric multirotor unmanned aerial vehicle system energy dynamics, *eTransportation*, 2022, **12**, p 100173.

[154] Tian, W., Liu, L., Zhang, X., Shao, J., and Ge, J. A coordinated optimization method of energy management and trajectory optimization for hybrid electric UAVs with PV/fuel cell/battery, *Int.J. Hydrogen Energy*, 2024, **50**, pp 1110–1121.

[155] Tian, W., Liu, L., Zhang, X., Shao, J. and Ge, J. Adaptive hierarchical energy management strategy for fuel cell/battery hybrid electric UAVs, *Aerosp. Sci. Technol.*, 2024, **146**, p 108938.

[156] Pratt, J.W., Brouwer, J. and Samuelsen, G.S. Performance of proton exchange membrane fuel cell at high-altitude conditions, *J. Propul. Power*, 2007, **23**, (2), pp 437–444.

[157] Schacht-Rodrguez, R., Ponsart, J.-C., Garca-Beltrán, C.-D., Astorga-Zaragoza, C.-M., Theilliol, D. and Zhang, Y. Path planning generation algorithm for a class of UAV multirotor based on state of health of lithium polymer battery, *J. Intell. Robot. Syst.*, 2018, **91**, pp 115–131.

[158] Conte, C., Rufino, G., De Alteriis, G., Bottino, V. and Accardo, D. A data-driven learning method for online prediction of drone battery discharge, *Aerosp. Sci. Technol.*, 2022, **130**, p 107921.

[159] Rodriguez, R.S. *UAV mission planning based on Prognosis & Health Management*. PhD thesis, Université de Lorraine; Centro Nacional de Investigación y Desarrollo Tecnologico, 2019.

[160] Mitici, M., Hennink, B., Pavel, M. and Dong, J. Prognostics for lithium-ion batteries for electric vertical take-off and landing aircraft using data-driven machine learning, *Energy AI*, 2023, **12**, p 100233.

[161] Massaro, M.C., Pramotton, S., Marocco, P., Monteverde, A.H.A. and Santarelli, M. Optimal design of a hydrogen-powered fuel cell system for aircraft applications, *Energy Convers. Manag.*, 2024, **306**, p 118266.

[162] Dobrokhodov, V., Jones, K.D., Walton, C. and Kaminer, I.I. Energy-optimal trajectory planning of hybrid ultra-long endurance UAV in time-varying energy fields, in *AIAA Scitech 2020 Forum*, Orlando, Florida, US, 2020, p 2299.

[163] Apeland, J. Fuel cell powered drone: use of fuel cells to extend multirotor drone endurance, *Doctoral Dissertation, University of Stavanger*, 2021.